



C04/25600350

TOWNSEND and TOWNSEND and CREW LLP  
Two Embarcadero Center, 8th Floor  
San Francisco, California 94111-3834  
(415) 576-0200

**ASSISTANT COMMISSIONER FOR PATENTS**  
**BOX PATENT APPLICATION**  
**Washington, D.C. 20231**

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is the

- ☒ patent application of  
☐ continuation patent application of  
☐ divisional patent application of  
☐ continuation-in-part patent application of

Inventor(s)/Applicant Identifier: Pratish R. Desai

For: METHOD AND APPARATUS FOR DISPLAYING VIDEO

☐ This application claims priority from each of the following Application Nos./filing dates:

the disclosure(s) of which is (are) incorporated by reference.

Please amend this application by adding the following before the first sentence: "This application is a ☐ continuation ☐ continuation-in-part of and claims the benefit of U.S. Provisional Application No. 60/\_\_\_\_\_, filed \_\_\_\_\_, the disclosure of which is incorporated by reference."

Enclosed are:

- ☒ 10 page(s) of specification  
☒ 5 page(s) of claims  
☒ 1 page of Abstract  
☒ 7 sheet(s) of ☐ formal ☒ informal drawing(s).

An assignment of the invention to \_\_\_\_\_ VM Labs, Inc.

A ☐ signed ☐ unsigned Declaration & Power of AttorneyA ☒ signed ☐ unsigned Declaration.

A Power of Attorney by Assignee with copy of Assignment.

A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27 ☐ is enclosed ☐ was filed in the prior application and small entity status is still proper and desired.

A certified copy of a \_\_\_\_\_ application.

Information Disclosure Statement under 37 CFR 1.97.

A petition to extend time to respond in the parent application.

Notification of change of ☐ power of attorney ☐ correspondence address filed in prior application.

	(Col. 1)	(Col. 2)	
FOR:	NO. FILED	NO. EXTRA	
BASIC FEE			
TOTAL CLAIMS	29 - 20	= *9	
INDEP. CLAIMS	5 - 3	= *2	
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED			

\* If the difference in Col. 1 is less than 0, enter "0" in Col. 2.

## SMALL ENTITY

RATE	FEE
	\$345.00
x \$9.00 =	
x \$39.00 =	
+ \$130.00 =	
TOTAL	

## OTHER THAN SMALL ENTITY

RATE	FEE
	\$690.00
x \$18.00 =	\$162.00
x \$78.00 =	\$156.00
+ \$260.00 =	
TOTAL	\$1,008.00

Please charge Deposit Account No. 20-1430 as follows:

- ☒ Filing fee \$1,008.00  
☒ Any additional fees associated with this paper or during the pendency of this application.  
☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b)

- ☐ A check for \$\_\_\_\_\_ is enclosed.  
☐ 2 extra copies of this sheet are enclosed.

Respectfully submitted,  
TOWNSEND and TOWNSEND and CREW LLP

*William F. Vobach*

William F. Vobach  
Reg No.: 39,411  
Attorneys for Applicant

Telephone: (415) 576-0200  
Facsimile: (415) 576-0300

Attorney Docket No. 19223-000510US

"Express Mail" Label No. EK482277536US

Date of Deposit: April 26, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above, addressed to:

Assistant Commissioner for Patents  
Washington, D.C. 20231

By: *Say Barden*

Customer No. 20350  
TOWNSEND and TOWNSEND and CREW LLP  
Two Embarcadero Center, 8<sup>th</sup> Floor  
San Francisco, California 94111-3834  
(415) 576-0200

**ASSISTANT COMMISSIONER FOR PATENTS**  
**BOX PATENT APPLICATION**  
**Washington, D.C. 20231**

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is the

- ☒ [ X ] patent application of  
☐ [ ] continuation patent application of  
☐ [ ] divisional patent application of  
☐ [ ] continuation-in-part patent application of

Inventor(s)/Applicant Identifier: Pratish R. Desai

For: METHOD AND APPARATUS FOR DISPLAYING VIDEO

[ ] This application claims priority from each of the following Application Nos./filing dates:

the disclosure(s) of which is (are) incorporated by reference.

[ ] Please amend this application by adding the following before the first sentence: "This application is a [ ] continuation [ ] continuation-in-part of and claims the benefit of U.S. Provisional Application No. 60/\_\_\_\_\_, filed \_\_\_\_\_, the disclosure of which is incorporated by reference."

Enclosed are:

- ☒ [ X ] 10 page(s) of specification  
☒ [ X ] 5 page(s) of claims  
☒ [ X ] 1 page of Abstract  
☒ [ X ] 7 sheet(s) of [ ] formal [ X ] informal drawing(s).

☒ [ X ] An assignment of the invention to VM Labs, Inc.

☐ [ ] A [ ] signed [ ] unsigned Declaration & Power of Attorney

☒ [ X ] A [ X ] signed [ ] unsigned Declaration.

☒ [ X ] A Power of Attorney by Assignee with copy of Assignment.

☐ [ ] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27 [ ] is enclosed [ ] was filed in the prior application and small entity status is still proper and desired.

☐ [ ] A certified copy of a \_\_\_\_\_ application.

☐ [ ] Information Disclosure Statement under 37 CFR 1.97.

☐ [ ] A petition to extend time to respond in the parent application.

☐ [ ] Notification of change of [ ] power of attorney [ ] correspondence address filed in prior application.

	(Col. 1)	(Col. 2)	
FOR:	NO. FILED	NO. EXTRA	
BASIC FEE			
TOTAL CLAIMS	29 - 20	= *9	
INDEP. CLAIMS	5 - 3	= *2	
[ ] MULTIPLE DEPENDENT CLAIM PRESENTED			

\* If the difference in Col. 1 is less than 0, enter "0" in Col. 2.

Please charge Deposit Account No. 20-1430 as follows:

- ☒ [ X ] Filing fee \$ \$1,008.00  
☒ [ X ] Any additional fees associated with this paper or during the pendency of this application.  
☐ [ ] The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b)
- [ ] A check for \$ \_\_\_\_\_ is enclosed.  
2 extra copies of this sheet are enclosed.

Telephone: (415) 576-0200  
Facsimile: (415) 576-0300

Attorney Docket No. 19223-000510US

"Express Mail" Label No. EK482277536US

Date of Deposit: April 26, 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above, addressed to:

Assistant Commissioner for Patents  
Washington, D.C. 20231

By: Sing Barden

SMALL ENTITY		OR	OTHER THAN SMALL ENTITY	
RATE	FEE		RATE	FEE
	\$345.00	OR		\$690.00
x \$9.00 =		OR	x \$18.00 =	\$162.00
x \$39.00 =		OR	x \$78.00 =	\$156.00
+ \$130.00 =		OR	+ \$260.00 =	
TOTAL		OR	TOTAL	\$1,008.00

Respectfully submitted,  
TOWNSEND and TOWNSEND and CREW LLP

William F. Vobach

William F. Vobach  
Reg No.: 39,411  
Attorneys for Applicant

**PATENT APPLICATION**  
**METHOD AND APPARATUS FOR DISPLAYING VIDEO**

Inventor:

Pratish R. Desai, a citizen of India, residing at,  
34778 Comstock Common  
Fremont, CA 94555

Assignee:

VM Labs, Inc.  
520 San Antonio Road  
Mountain View, CA 94040

## METHOD AND APPARATUS FOR DISPLAYING VIDEO

This patent application claims the benefit of U.S. Provisional Application No. 60/174,464, filed January 5, 2000, which is hereby incorporated by reference.

### BACKGROUND OF THE INVENTION

5 This invention relates generally to the presentation of audio/visual material. More particularly, this invention relates to the presentation of different versions of an audio/visual program or the presentation of different locations in a program so as to allow a user to select a preferred presentation.

In the past, audio/visual (AV) programs such as movies, television shows, music  
10 videos, video games, training materials, etc. have typically involved a single play version of the program. The user would begin play of the program and watch the program from beginning to end. A single presentation was implemented in displaying the program. A user did not have any option to view the program from a different angle, with a different soundtrack, in a different language, with subtitles, etc. because the video could not  
15 accommodate multiple options. However, with the introduction of DVD technology, a user now has greater options to choose from. A storyline in a movie, for example, can be shot from different angles and stored as different versions on a DVD storage medium. Similarly, a movie might be sold with optional language tracks. Thus, a viewer could decide to watch the movie with a French language track rather than English, for example.  
20 As another example, a movie might be presented with different endings. Thus, a user could select a preferred ending option before playing the movie. However, there is a need to present these different options to a user that removes the need for any specialized codes or difficult programming steps. In addition, there is a need for a system that allows a user to implement these options during the playback of an AV program, rather than at the  
25 beginning. For example, if a sporting event is being shown and one angle of view is generally preferred by the viewer, that angle of view can be selected at the beginning of the program. However, if a play would be seen more easily from another angle, it would be desirable to allow the viewer to change the angle of presentation to one of the different angles to view the play. The determination of when the different angle should be  
30 implemented would occur during the normal playback of the program. Thus, there is a need for a system that allows this choice to be made easily during normal playback as well as in an easy manner.

Also, it has been possible through the use of VCR's to fast forward or reverse through a video to select a point in time during the video from which to begin viewing. This allowed one to fast-forward through portions of the AV program that already had been viewed at an earlier date or were simply not of interest to the viewer. A user had to physically scan through the video in order to try and determine a new location from which to begin viewing. However, this was a lengthy process that involved a lot of hit or miss trial and error. As a result, it was easy for a viewer to go too far in a video and skip over unseen material. Therefore, there is still a need for a system that gives a viewer a choice or a preview of different sections of an AV program in an automatic or efficient manner, so that the user can easily find the area of interest in the program.

In providing choices to a viewer, other systems have been limited by the way in which alternatives are presented. There is a need for a system that provides a user with a stronger association between the option being presented and the symbol used to represent that option.

## SUMMARY OF THE INVENTION

The present invention provides a method and apparatus for displaying AV material having several different possible presentations. A datastream of information for the different AV presentations is received; a first AV presentation is displayed in normal playback mode; an alternative AV presentation is also displayed; and a user is permitted to select a desired AV presentation for display. The method can be implemented using a circuit that has an input to receive the datastream of information for the different presentations; a decoding circuit operable to decode the information of the datastream so as to output a signal for displaying the first presentation of the program; a selection circuit that is operable to re-configure the decoding circuit so that the decoding circuit decodes the datastream so as to display a second presentation of the program; and a receiver that is configured to receive an input from a user that indicates a desired presentation for display.

Another embodiment of the invention provides a method and apparatus for receiving a datastream comprised of information for a plurality of presentations of an AV program; displaying a first presentation of the program in normal playback mode; then, displaying an alternative presentation of the program in normal playback mode; and permitting the user to select a desired presentation of the program.

One embodiment of the invention provides a method of receiving a datastream comprising information for displaying the AV program; playing audio of a first portion of the program while displaying video of that portion; playing audio of a second presentation of the program while playing video of that section; and permitting the user to select from which portion of the program normal playback should be initiated. With this embodiment, different chapters of a movie, for example, can be displayed for the viewer's selection of where playback should be initiated.

The various embodiments of the invention provide alternative enhancements such as converting a displayed video section to graphics for display during playback of an alternative video presentation; highlighting one of several displayed options so as to allow a user to select one of the options; implementing normal playback of one presentation while continuing with a display of alternative presentations; updating the alternative presentations to coincide with a new portion in the primary presentation being displayed.

Thus, the different embodiments of the invention are advantageous for a variety of reasons. For example, a viewer can now choose from a variety of options of how program material is presented. The viewer is given greater freedom of choice in playing back program material in a manner that pleases the viewer such as from a different angle. Furthermore, this choice can be made during normal playback of a program; it need not be made at the beginning of the program. In addition, various options can be presented such that a user can easily select a presentation. Similarly, a user need not rely on codes or inputting a series of numbers; rather, the viewer's choice is made easier by actually showing a portion of the program from the various alternatives and allowing the user to immediately identify each option and make a selection.

Other and further advantages and features of the invention will be apparent to those skilled in the art from a consideration of the following description taken in conjunction with the accompanying drawings wherein certain methods and apparatuses for practicing the invention are illustrated. However, it is to be understood that the invention is not limited to the details disclosed but includes all such variations and modifications as fall within the spirit of the invention and scope of the appended claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

This 1 shows a flowchart for one embodiment of the invention that illustrates how several different presentations of a program are presented for a user's selection.

Figure 2 shows an example of a display that can be used by the method illustrated in Figure 1 to present different presentations of a program for a user's selection.

5        Figure 3 shows a sample DVD datastream having four alternative presentations for displaying the same program.

Figure 4 shows a flowchart for another embodiment of the invention that illustrates how several different presentations of a program are presented one by one for a user's selection.

10       Figure 5 shows an example of a display that can be used by the method illustrated in Figure 4 to present different presentations of a program for a user's selection.

Figure 6 shows a sample of a DVD datastream as implemented by the flowchart of Figure 4.

15       Figure 7 shows a flowchart for an embodiment of the invention that allows a user to select from a series of locations in the time sequence of a program, e.g., chapters of a movie.

Figure 8 shows an example of a display that can be used by the method illustrated in Figure 7 to present different portions of a program for a user's selection.

20       Figure 9 shows a sample DVD datastream and order of display of the data in the datastream according to the method in Figure 7.

Figure 10 shows an apparatus for implementing the invention according to the flowcharts shown in Figures and 1,4, and 7.

#### DESCRIPTION OF THE SPECIFIC EMBODIMENTS

25       Referring now to the figures and more particularly to Figure 1, a first embodiment of the invention can be seen. Figure 1 illustrates a flowchart 100 in which a variety of presentations of a program can be viewed by a user and then selected by the user. Such presentations might include different camera angles from which a movie is filmed, different language tracks for a movie, different graphics or difficulty levels for a video  
30       game, different subtitle settings for a movie, etc. They might even include the option of different combinations of the above. For purposes of explaining this embodiment of the invention, Figure 1 will be described with reference to a movie which was filmed from different angles and from which the user can choose in order to select an angle presentation from which the movie should be displayed. However, it should be

understood that other types of program material other than a movie as well as other presentation characteristics other than the angle from which a movie is filmed could also be implemented by the invention.

- In Figure 1, a datastream is received by a circuit such as that shown in Figure 10.
- 5 Preferably the datastream is an MPEG-2 formatted datastream containing DVD information. However, other similar formats and conventions could be utilized as well. A portion of the datastream is shown in Figure 3. As can be seen in Figure 3, the data segment 300 is comprised of several interleaved video object units known as ILVUs, namely data blocks 304, 308, 312, 316, 320, 324, 328, 332, and 336. These ILVUs
- 10 contain information for displaying the program material at different camera angles. Thus, by playing the material in ILVUs 304, 320, and 326, a first angle is presented as normal playback.

- The flowchart shows that as the datastream is received, the total number of available presentations of the video encapsulated by the datastream is determined 108.
- 15 This can be accomplished by a processor which processes header information indicating how many presentations are included with the DVD material. Then, one of the presentations (e.g., camera angles) is designated as a primary presentation. Preferably, this will be the first presentation, namely ILVU blocks 1A, 1B, 1C, etc. in Figure 3. This designation as to which presentation is the primary presentation is then stored in memory
- 20 112.

- Once a primary camera angle is selected, information from the datastream is collected for that camera angle. Thus, the track buffer shown in Figure 3 is preferably controlled by the microprocessor to buffer ILVUs 304, 320, and 336. The other ILVUs shown in Figure 3 apply to other camera angles; thus, they would not be needed. This
- 25 data in the track buffer for use in displaying the first camera angle would then be decoded from its MPEG-2 format for output for display. Typically, audio and video outputs would be utilized to output the information to a display. This can be seen in Figure 2 in which the display of the primary presentation is shown as the primary display 204 on a portion of the display 200.

- 30 Next, a second presentation of the program material is decoded and displayed 120. Preferably, this is accomplished simultaneously with the display of the primary presentation as shown by Figure 2 where portion 204 of the display represents the primary presentation and portion 208 of the display represents a second presentation. In typical DVD players, however, the limited resources to decode and display a first



presentation will prevent simultaneous display of a second presentation. Therefore, the DVD player will need to wait until resources permit the gathering and processing of data for displaying the second presentation. Thus, this presentation may need to occur intermittently as resources permit. Consequently, it might be more practical to simply  
5 gather enough data for a singular frame of video representing the second camera angle. This camera angle could then be decimated and converted to a 16 bit per pixel image 122 for display as a graphics image on the display 124. Thus, a variety of different implementations could be used to present the second camera angle on the display.

Normally when collecting data from a DVD disc, the processor will cause the  
10 pickup to jump from ILVU 1A to ILVU 1B to ILVU 1C as shown in Figure 3 by lines 340 and 344. However, the gathering of data for a frame can be accomplished by having the processor not skip from 1A to 1B; but rather, if resources permit, scan ILVU 2A. This will allow the pickup to obtain the information for the second presentation if resources permit. Thus, by simply monitoring resources such as memory, the track  
15 buffer, processor use, etc. one can determine when an appropriate time exists to gather information for the second presentation.

With two camera angle choices available to the user, namely the first presentation displayed on the screen and the graphic of the second presentation displayed on the screen, a user is in a position to make a selection. Thus, a determination is made as to  
20 whether the user has selected a presentation 128. Of course such a selection could come at an earlier point in time as well.

If the user has not made a selection, a check is made to see if additional camera angles exist for display 132. If more camera angles do exist, information for display of those camera angles are presented as well 136. Again, the processing resources may limit  
25 how much of the presentation can be displayed. If the MPEG encoding of the primary display is very simple, e.g., a repeating scene of a blue sky, then greater resources will be available to process the next presentation for display. Thus, data can be gathered as described above in regard to the second presentation and decoded and displayed 136. Similarly, the presentation can be converted to graphics format 138 and displayed on the  
30 screen 140. The process is then repeated until no more alternative presentations exist for display or until the user selects a new camera angle from which to view. These alternative presentations are shown in Figure 3 as display portions 208, 212, and 216.

It is preferred to allow the primary presentation to play at normal forward view. Thus, the processor is preferably configured to play the primary camera angle at normal

5 playback while the additional presentations are intermittently presented as resources permit. Therefore, after a first group of alternative presentations are displayed, new presentations can be presented corresponding with the current point in the program being displayed by the primary presentation. Consequently, the alternative presentations are essentially incremented to a new location corresponding with the current location of the first presentation being displayed 144. Then, the process is repeated such that new scenes from the movie are displayed corresponding with the different camera angles.

While a user might simply press a button labeled with a number on the user's remote control in order to select a displayed angle to view, the option can be enhanced by 10 circling the various displayed angles with a graphic pointer 220 as shown in Figure 2. For example, the graphic pointer 220 could simply be a flashing white square surrounding the graphic image that displays the second presentation of the movie. Thus, a user could push the enter button to select that view when it was surrounded by the flashing marker. After a time period, the flashing square would move to the next camera angle view and 15 flash around it.

Figure 4 shows another embodiment of the invention in flowchart 400. Once again, for purposes of this example, a movie filmed in alternative camera angles will be used as the example to demonstrate the various presentations available. Once again, a datastream containing a plurality of presentations for the AV program is received 404, 20 e.g., camera angles for a movie. Then, a first camera angle is displayed on a portion of the display 408. This can be seen in Figure 5 in which display portion 504 of display 500 is used to display the first camera angle presentation. Then, the first camera angle presentation is converted to a graphics format and displayed 412 on display portion 504. At this point, the user has the option to select the displayed presentation for full display 25 viewing 416. Consequently, a test is made to see if the user has made a selection 420. If no selection has been made, then a test is made to determine whether another presentation exists 424. As one of ordinary skill in the art would understand, this can be accomplished by checking header information contained in the datastream. If another camera angle presentation does exist, then that camera angle presentation is accessed, decoded and 30 displayed in normal playback mode 428. A pre-determined time segment is preferably displayed that is sufficient to allow a highlight of the camera angle presentation. The presentation is displayed on portion 508 of display 500. This presentation is then converted to graphics and displayed in graphics format. The process is then repeated: allowing the user to select a presentation and displaying additional presentations, e.g.,

display presentations 512 and 516 in Figure 5, in normal playback speed in a cyclical fashion.

This is symbolically represented in Figure 6. Figure 6 shows that a first block of data 604 for a first presentation is accessed, decoded and displayed. Then, the second block 608 is accessed, decoded and displayed as demonstrated by arrow 624. Similarly, blocks 612 and 616 are accessed, decoded and displayed. Once all presentations have been displayed, the process can be repeated by incrementing to the next segment in the movie 436, e.g., starting with block 620. Alternatively, the process could be repeated by not incrementing and simply starting again with block 604. Thus, this embodiment allows the display to show the different angles in a cyclical manner such that each angle can be seen at normal forward speed. Thus, it is a solution for a processor with limited resources that can only display one angle at normal full speed; yet it provides a way for all angles to be presented for a viewer's selection. Once a user does select a camera angle presentation for viewing, then that camera angle can be displayed as a full screen view

A variety of different time sequences can be used in this embodiment of the invention. For example, the different presentations could all represent the same (i.e., contemporaneous) segment in time for the movie, e.g., the same explosion in an action movie filmed from different angles. Alternatively, the different presentations could represent sequential segments in time such that the second presentation follows the segment displayed by the first presentation, etc. Similarly, the different presentations could represent overlapping sequences in time.

In addition, these various presentations can be highlighted as explained above for the previous embodiment to facilitate the choice of camera angle by the user. Similarly, in creating a graphics representation, it is not necessarily important to capture an entire frame. One might simply choose to capture a portion of a frame. In presenting the various camera angle presentations, one can optionally play the audio associated with the video aspect of the camera angle.

Another embodiment of the invention can be seen in Figure 7. Many DVD formatted programs are divided into chapters that represent, for example, equal time segments of a movie. Rather than a pure time division aspect, a subject matter aspect might be associated with chapters for a program. Regardless, the chapter allows the viewer to determine from where playback should begin. Thus, the present invention is

useful in displaying various chapters for a viewer's review. In addition, it is useful in that it allows the associated audio with a chapter segment to be displayed as well.

In the flowchart 700 of Figure 7, a datastream comprising information for the AV program is received 704. This datastream is then decoded such that a presentation of a first segment, i.e., first chapter, of the program is displayed with its associated audio track 708. This first presentation is shown as video display portion 801 on display 800 in Figure 8. The first presentation is then converted to a graphic format, e.g., by decimating a screen of the presentation and converting that to a 16 bit per pixel graphic image. Then, that graphic image is displayed on the display 712. A test is then made to determine whether additional chapter segments exist for display 716. If another chapter segment exists for display, then that chapter segment is decoded and displayed 720, e.g., on screen portion 802 of screen 800. Then, a video image for the chapter segment can be converted to a graphic image and displayed 724.

As noted earlier, a chapter can be highlighted to allow the user to select one of the chapters from which playback should be begun 728. Thus, the user is allowed to make a selection 732 and a determination is made as to whether the user actually made a selection 736. If no selection was made by the user, then the process repeats so as to display additional chapters. Thus, the pickup on the DVD player is advanced to the next chapter location on the DVD disk and information is gathered for a segment for the next chapter. This process is repeated for additional chapters 803, 804, 805, 806, 807, 808, and 809. If no additional chapters exist for display, then the existing chapter graphics can remain while the highlighter 820 is cycled through them so as to provide a user with easy selection by pressing the enter key of the remote control transmitter unit. Once a chapter is selected, playback can be initiated from that chapter point of the movie in normal playback mode 740. The pickup of the DVD player would simply need to be positioned at that chapter location on the DVD disc.

Figure 9 shows an illustration of the various datablocks corresponding with the various chapters shown in Figure 8. The number of chapters could vary depending on the manufacturer of the program. Figure 9 represents 9 data blocks 901-909. Each datablock corresponds with the data necessary for displaying a first portion of a chapter of the movie or other AV program. The arrows represent how the audio and video for each chapter segment are displayed in sequential order such that the viewer can not only see the video for a portion of a program but also hear the audio associated with that portion of the program.

Figure 10 illustrates a circuit for implementing the invention according to the flowcharts of Figures 1, 4, and 7. In circuit 1000, a DVD disc 1001 is shown coupled to a disk controller 1005. Typically a pickup will be used as a transducer to input the data from a DVD disc, for example. The disk controller is coupled to a track buffer 1010 which stores data for the presentation being displayed. This information can then be decoded by the processor. For example, the processor can separate selected chunks of data corresponding with the selected presentation for display. Similarly, the processor can be used to convert an MPEG encoded datastream to a format suitable for output. Information is conveyed from the track buffer to a stream demultiplexer 1014 in which the various audio and video streams are demultiplexed. These demultiplexed streams are subsequently conveyed to audio controller 1020 and video controller 1024. A display 1200 receives data from the video controller and audio controller to display the presentation. A processor 1016 controls the implementation of the flowcharts described above through software. For example, the processor operates as a selector to select the points in time occurring during a movie in order to playback chapter segments as described above. The processor is coupled to a memory such as RAM 1018. The user can provide input to the circuit through the use of a transmitter 1034, such as a remote control associated with a DVD player. The output from the transmitter is directed to a receiver 1030 which is coupled to the processor 1016. This circuit builds upon the circuit shown on page 135 of "DVD Demystified" by Jim Taylor, McGraw Hill publisher, copyright 1998, the entire content of which is hereby incorporated by reference in its entirety for all that it discloses and for all purposes.

It is thought that the apparatuses and methods of the embodiments of the present invention and many of its attendant advantages will be understood from the foregoing description and it will be apparent that various changes may be made in the form, construction and arrangement of the parts thereof without departing from the spirit and scope of the invention or sacrificing all of its material advantages, the form hereinbefore described being merely a preferred or exemplary embodiment thereof.

WHAT IS CLAIMED IS:

1                   1.     A method of displaying a video, said method comprising:  
2                   receiving a datastream comprising information for a plurality of  
3 presentations of said video;  
4                   displaying a first presentation of a segment from said video in normal  
5 playback on a display;  
6                   displaying at least a portion of a second presentation of said segment from  
7 said video on said display while displaying said first presentation; and  
8                   permitting a user to select a desired presentation for displaying on said  
9 display.

1                   2.     The method as described in claim 1 and further comprising:  
2                   converting a portion of said second presentation to a graphics format; and  
3                   displaying said graphics format on said display.

1                   3.     The method as described in claim 2 wherein said graphics format  
2 comprises a 16 bit per pixel graphic image.

1                   4.     The method as described in claim 2 and further comprising:  
2                   displaying successive segments of said first presentation of said video on  
3 said display; and  
4                   displaying at least a portion of one of said successive segments of said  
5 video according to said second presentation.

1                   5.     The method as described in claim 1 and further comprising:  
2                   displaying on said display a plurality of presentations of said video  
3 that are different from said first presentation while displaying on said display said first  
4 presentation of said video.

1                   6.     The method as described in claim 1 and further comprising:  
2                   decoding an MPEG datastream so as to obtain data for said displaying of  
3 said first presentation; and  
4                   decoding said MPEG datastream as resources permit so as to obtain data  
5 for said displaying of said second presentation.

1                   7.     The method as described in claim 1 wherein said datastream  
2 comprises a plurality of interleaved angles for said video.

1                   8.     The method as described in claim 1 and further comprising:  
2                   storing in memory an identifier which identifies a primary  
3 presentation being displayed on said display.

1                   9.     The method as described in claim 8 and further comprising:  
2                   displaying on said display a plurality of presentations of said video that are  
3 different from said first presentation while displaying on said display said first  
4 presentation of said video;  
5                   converting at least a portion of each of said plurality of presentations to a  
6 graphics format;  
7                   displaying each of said graphics format for each of said plurality of  
8 presentations on said display; and  
9                   updating each of said plurality of presentations of said video that are  
10 different from said first presentation as resources permit so as to correspond with a  
11 different segment of said video.

1                   10.    An apparatus to play a video, said apparatus comprising:  
2                   an input to receive an MPEG datastream, said datastream comprising  
3 information for a plurality of different presentations of said video;  
4                   a decoding circuit configured to decode said MPEG datastream so as to  
5 output a signal for displaying a first presentation of said video;  
6                   a selection circuit operable to re-configure said decoding circuit such that  
7 said decoding circuit is configured to decode said MPEG datastream so as to output a  
8 signal for displaying a second presentation of said video; and  
9                   a receiver configured to receive during use a signal from a user that  
10 indicates a desired presentation to display.

1                   11.    A method of selecting from a plurality of presentations of a video a  
2 desired presentation for viewing the video, said method comprising:  
3                   receiving a datastream comprising information for a plurality of  
4 presentations of said video;

5 displaying on a display in normal playback mode a segment of a first  
6 presentation of said video; then  
7 displaying on said display in normal playback mode a segment of a second  
8 presentation of said video; and  
9 permitting a user to select a desired presentation of said video.

1 12. The method as described in claim 11 wherein said displaying on a  
2 display in normal playback mode a segment of a first presentation of said video comprises  
3 displaying a segment of said first presentation for a predetermined period of time.

1 13. The method as described in claim 12 and further comprising  
2 displaying each presentation of said video on a different segment of said display.

1 14. The method as described in claim 11 wherein said displaying of  
2 said second presentation displays a segment of said video that follows in time said  
3 segment of said video displayed by said displaying of said first presentation.

1 15. The method as described in claim 11 wherein said displaying of  
2 said second presentation displays a segment of said video that is contemporaneous in time  
3 with said segment of said video displayed by said displaying of said first presentation.

1 16. The method as described in claim 11 wherein said displaying of  
2 said second presentation displays a segment of said video that overlaps in time with said  
3 segment of said video displayed by said displaying of said first presentation.

1 17. The method as described in claim 11 wherein said datastream  
2 comprises video objects interleaved as blocks such that each interleaved block contains  
3 data for one of said plurality of presentations.

1 18. The method as described in claim 12 and further comprising:  
2 converting a portion of said first presentation to a graphics format; and  
3 displaying said graphics format on said display so as to represent said first  
4 presentation while displaying on said display in normal playback mode said segment of  
5 said second presentation of said video.

1 19. The method as described in claim 18 and further comprising:  
2 converting portions of all of said presentations to graphics format;



3 displaying all of said graphics formats on said display;  
4 indicating to a user during use a particular one of said displayed  
5 presentations; and  
6 allowing the user to select a preferred presentation.

1 20. The method as described in claim 19 and wherein said indicating  
2 comprises:  
3 cycling through each of said displayed presentations so as to indicate to the  
4 user each presentation and so as to allow the user to select a presentation when said  
5 presentation is indicated.

1 21. The method as described in claim 11 and further comprising:  
2 playing an audio segment corresponding to said segment of said first  
3 presentation of said video while displaying said first presentation of said video.

1 22. A method of permitting a user to select a point in time occurring  
2 during playback of an audiovisual (A/V) program from which to initiate displaying said  
3 A/V program, said method comprising:  
4 receiving a datastream comprising information for displaying said A/V  
5 program;  
6 playing audio of a first segment of said A/V program while displaying  
7 video of said first segment of said A/V program wherein said first segment corresponds to  
8 a first point in time occurring during normal playback of said A/V program;  
9 playing audio of a second segment of said A/V program while displaying  
10 video of said second segment of said A/V program, wherein said second segment  
11 corresponds to a second point in time occurring during normal playback of said A/V  
12 program;  
13 permitting said user to select from where in said A/V program playback  
14 should be initiated.

1 23. The method as described in claim 22 and further comprising:  
2 displaying at least three segments of said A/V program on said display  
3 wherein each of said three segments occurs at a point in time during normal playback of  
4 said A/V program that is different relative to said other segments.

1 24. The method as described in claim 22 and further comprising:

2 converting a portion of said first video segment of said A/V program to a  
3 graphics format; and  
4 displaying said graphics format on said display while playing audio of said  
5 second segment of said A/V program while displaying video of said second segment of  
6 said A/V program.

1 25. The method as described in claim 22 wherein said permitting said  
2 user to select from where in said A/V program playback should be initiated comprises  
3 permitting said viewer to select one of said displayed segments.

1 26. The method as described in claim 25 and further comprising:  
2 initiating display of said A/V program from approximately the segment of  
3 the A/V program selected by said viewer.

1 27. The method as described in claim 22 wherein said segments  
2 correspond with substantially equivalent time divisions of said entire A/V program.

1 28. The method as described in claim 22 wherein said segments  
2 correspond with chapters of subject matter of said A/V program.

1 29. An apparatus to allow a viewer to select a point in time occurring  
2 during playback of a moving picture from which to initiate displaying of said moving  
3 picture, said apparatus comprising:  
4 an input to receive an MPEG datastream for said DVD program;  
5 a decoding circuit configured to decode said MPEG datastream;  
6 an audio circuit configured to output a segment of said moving picture  
7 from said decoded MPEG datastream;  
8 a video circuit configured to output said segment of said moving picture  
9 from said decoded MPEG datastream;  
10 a selector operable to select a plurality of points in time occurring during  
11 playback of said moving picture so as to allow a plurality of segments of said motion  
12 picture to be output by said audio and video circuits.

## METHOD AND APPARATUS FOR DISPLAYING VIDEO

### ABSTRACT OF THE DISCLOSURE

A method and apparatus for displaying different presentations of program material allows various presentations of a DVD movie, for example, to be displayed on a display for a user's selection. The various presentations might involve different angles from which a user must select or different chapters from which a program should begin. The selection of a presentation is facilitated by displaying the various options on a single display such that the user can quickly choose which presentation to choose. Furthermore, audio is provided with chapter presentations to assist a user in selecting a chapter from where playback should be initiated.

DE 7009508 v1

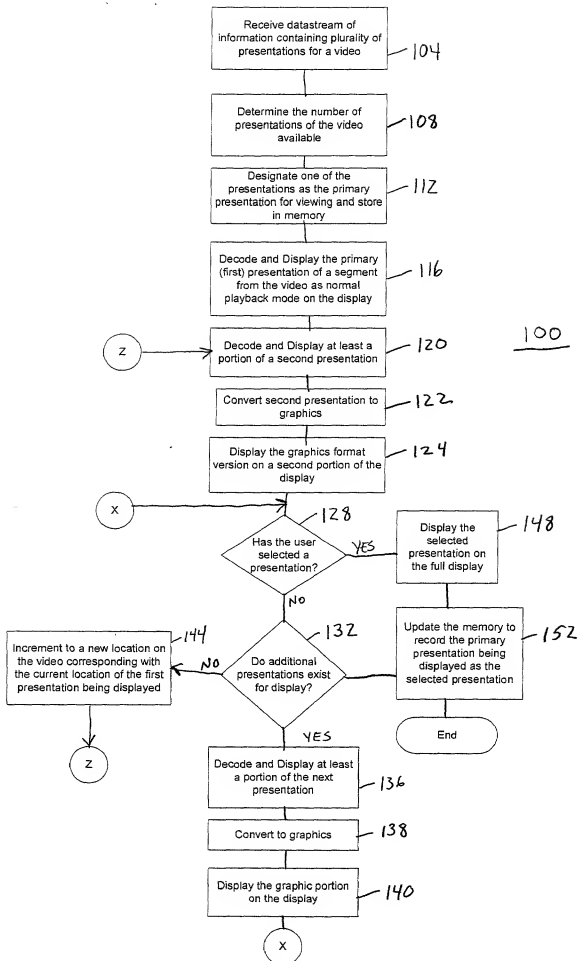


FIG. 1

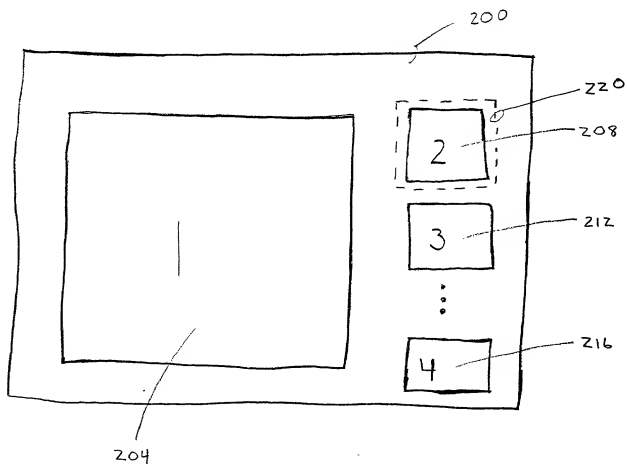


FIG. 2

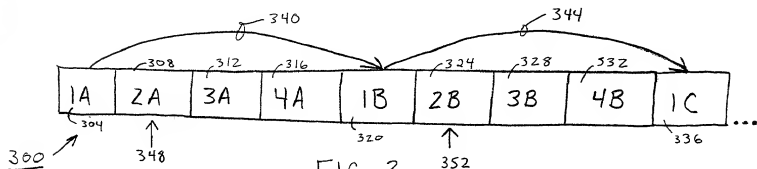


FIG. 3

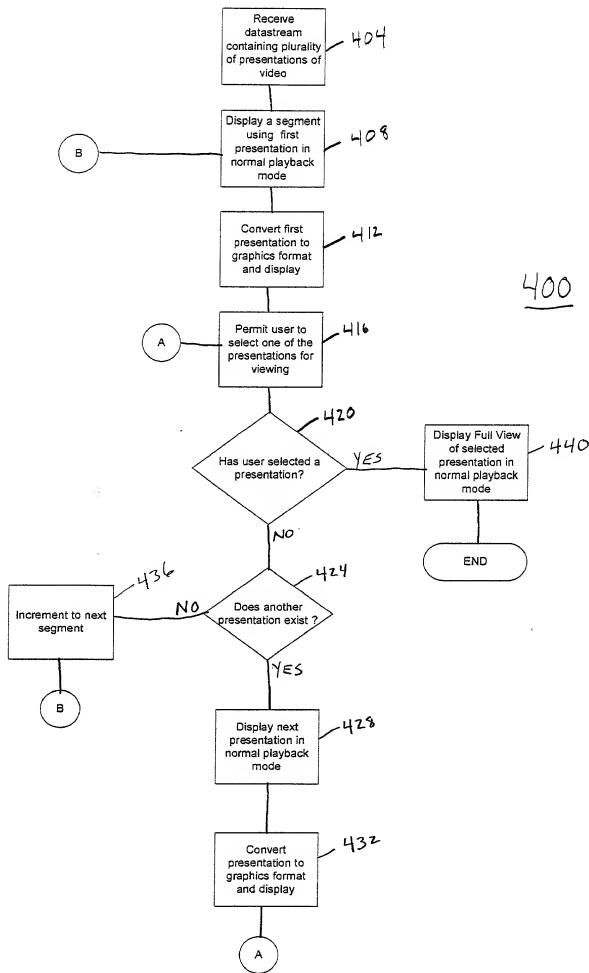


FIG. 4

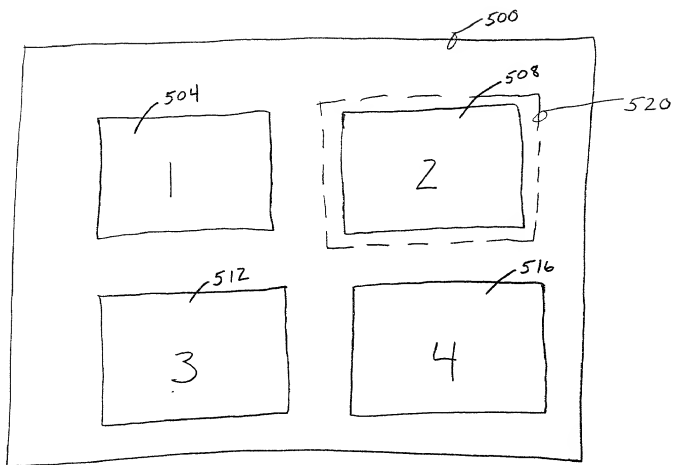


FIG. 5

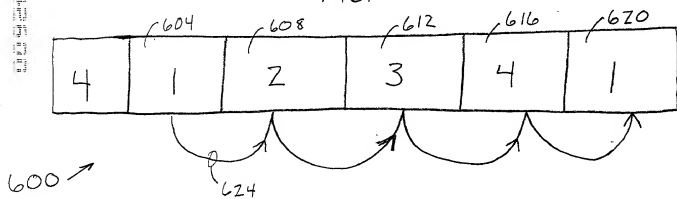


FIG. 6

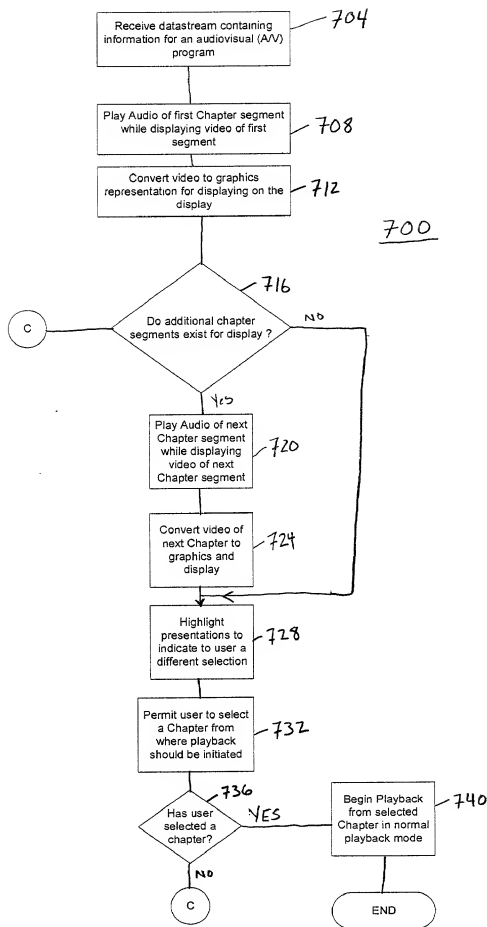


FIG. 7



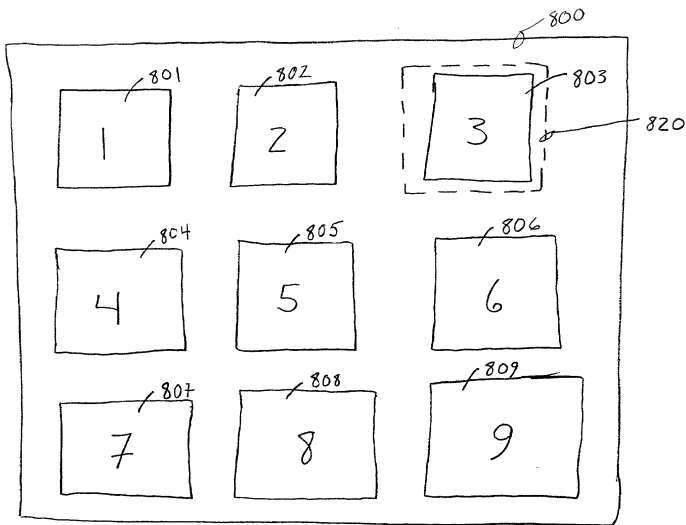


FIG. 8

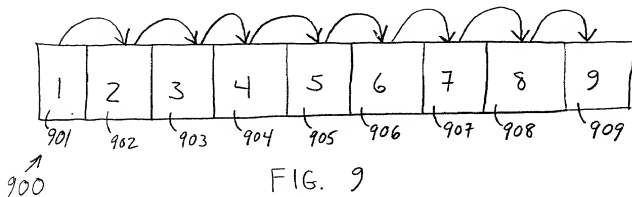


FIG. 9

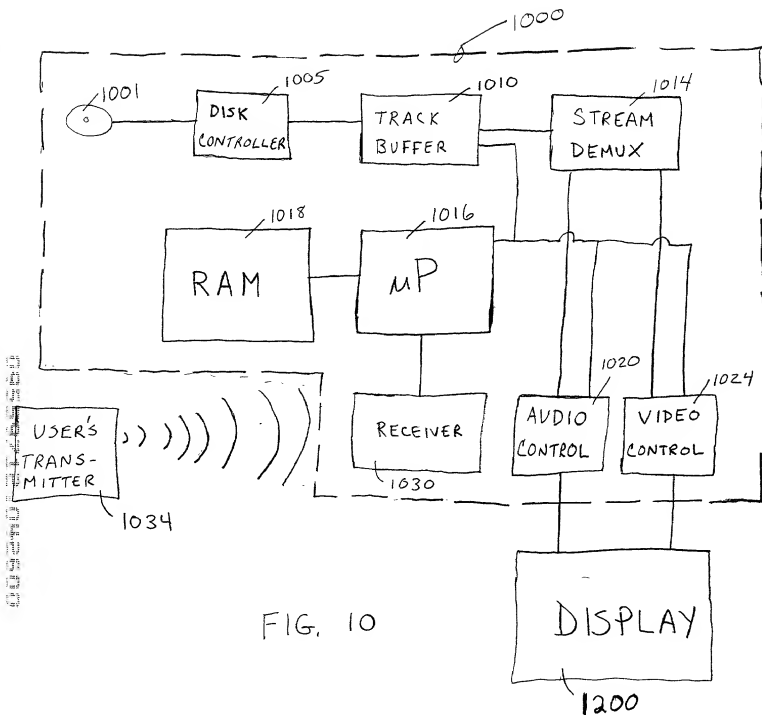


FIG. 10

**DECLARATION**

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD AND APPARATUS FOR DISPLAYING VIDEO** the specification of which   X   is attached hereto or        was filed on                      as Application No.                      and was amended on                      (if applicable).

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56. I claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

**Prior Foreign Application(s)**

Country	Application No.	Date of Filing	Priority Claimed Under 35 USC 119

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

Application No.	Filing Date
60/174,464	January 5, 2000

I claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application No.	Date of Filing	Status

Full Name of Inventor 1:	Last Name: <b>DESAI</b>	First Name: <b>PRATISH</b>	Middle Name or Initial: <b>R.</b>
Residence & Citizenship:	City: <b>Fremont</b>	State/Foreign Country: <b>California</b>	Country of Citizenship: <b>India</b>
Post Office Address:	Post Office Address: <b>34778 Comstock Common</b>	City: <b>Fremont</b>	State/Country: <b>California</b>
			Postal Code: <b>94555</b>

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 1

*Pratish*

PRATISH R. DESAI

Date

4/4/2000

DE 7013250 v1